



Color Variants

VI414111
Stainless steel frame
Width 38 cm

Optional accessories
GP900004
Stainless steel frying sensor pan
WP400001
Wok pan made of multiple-layer material
WZ400001
Wok attachment for wok pan

Installation Accessories
VA420000
Connection strip for combination with other Vario appliances of the 400 series for flush mounting
VA420001
Connection strip for combination with other Vario appliances of the 400 series for flush mounting with appliance cover/filler strip
VA420010
Connection strip for combination with other Vario appliances of the 400 series for surface mounting
VA420011
Connection strip for combination with other Vario appliances of the 400 series for surface mounting with appliance cover/filler strip
VA450401
Stainless steel filler strip 38 cm

VI414111
Vario induction wok 400 series
Stainless steel frame
Width 38 cm

Precision crafting of 3 mm stainless steel
Solid stainless steel control knob
For surface mounting with a visible edge or for flush mounting
Full electronic power level regulation on 12 levels
32 cm cooking zone with booster function
Ideal for the original wok pan with round bottom, with wok ring
Frying sensor function for temperature control in pans
Easy control of all functions with bicoloured display
Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones
1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling
Control knobs with illuminated ring, cooking zone and output level markings.
Electronic power control in 12 output levels.
User friendly control with bicoloured display (white / orange).

Features
Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.

Safety
Residual heat indication.
Safety shut-off.


Planning notes
Appliance dimensions: (W x D) 380 mm x 520 mm
Installation dimensions: (H x W x D) 55 mm x 360 mm x 490 mm
Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).
If installing filler strip VA 450 take into account the additional space required for the depth.
If combining several appliances with at least one appliance cover, the filler strip VA 450 is required to compensate for the depth of the appliance without the appliance cover.
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
In the cut-out, the installation system requires the side edge to be at least 10 mm for surface mounting and at least 13 mm for flush mounting. Ensure a continuous cut surface of 90°.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Characteristics
Product name/family
Vario/Domino cooking zone cera
Built-in / Free-standing
CONSTR_TYPE.Built-in
Energy input
Electric
Total number of positions that can be used at the same time
1
Required niche size for installation (HxWxD)
55 x 360 x 490-500
Width of the product (mm)
380
Dimensions of the product (mm)
55 x 380 x 520
Dimensions of the packed product (HxWxD) (mm)
120 x 580 x 600
Net weight (kg)
10.1
Gross weight (kg)
11.0
Residual heat indicator
Separate
Location of control panel
External control
Basic surface material
Ceramic
Color of surface
Black, Stainless steel
Color of frame
Stainless steel
Approval certificates
AENOR, CE
Length electrical supply cord (cm)
150
EAN code
4242006261160


Consumption and connection features
Electrical connection rating (W)
3700
Gas connection rating (W)
Current (A)
Voltage (V)
220-240
Frequency (Hz)
50; 60
2018-05-31
Page 1

Additional instructions for flush mounting:
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 10 kg.



Connection
Total connected load 3.7 kW.
Connecting cable 1.5 m without plug.




* with appliance cover or filler strip
(observe the front and rear asymmetrical support,
see separate notes "Installation with appliance
cover/filler strip").

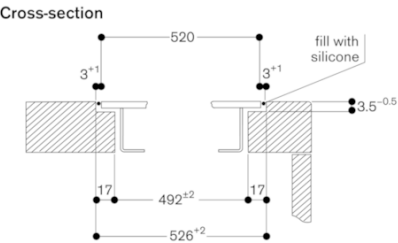

When installing with appliance cover or filler strip, pay attention
to the deeper cut-out and the front and rear groove width.

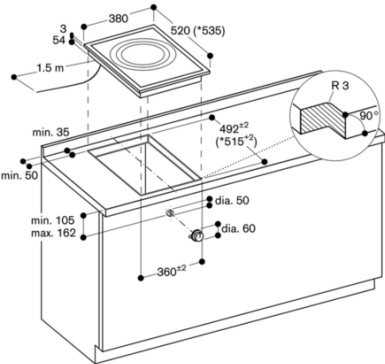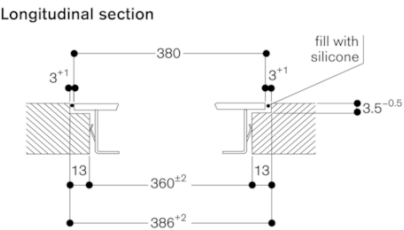


* with filler strip
See separate planning notes.

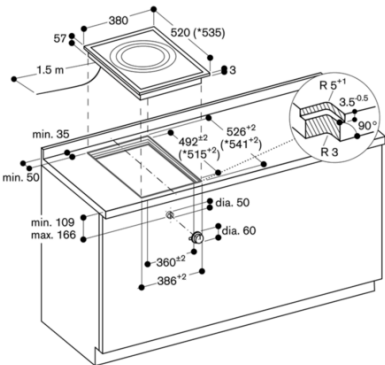

* with filler strip
See separate planning notes.

Installation of the control knob; flush installation

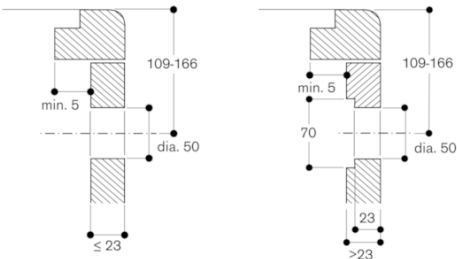

Installation of the control knob; surface mounting

