


KM 7999 FL

Induction cooktop with onset controls
with TempControl for perfect frying results

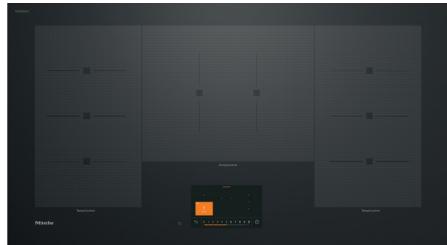


- Intelligent controls thanks to the touch display
- Flexible cooking areas for up to five pans
- With 8 TempControl sensors
- A width of 936mm for surface-mounted or flush-fit installation
- Communication with rangehood – automatic function Con@ctivity

Heating type	Induction
Heating type	Induction
Construction type	
Independent of oven	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Graphite black
Print design	Silent Move
Flush-fit installation	•
Surface-mounted installation	•
Cooking zone details	
Number of cooking zones	3
Maximum number of pans	5
Cooking zone	
Position	Left
Type	TempControl cooking zone
Size in mm	226x286
Max. rating in W	2800
Max. Booster power rating in W	3600
Position	Centred
Type	TempControl cooking zone
Size in mm	365x286
Max. rating in W	2800
Max. Booster power rating in W	3600
Position	right
Type	TempControl cooking zone
Size in mm	226x382
Max. rating in W	2800
Max. Booster power rating in W	3600
User convenience	
Networking with Miele@home	SmartSelect
Automatic function Con@ctivity 3.0	•
Operation via touch display	•
Operation via sensor controls	•
TempControl	•
PowerFlex Plus	•
Permanent pan recognition	•
Pan and pan size recognition	•
Stop & Go function	•
Recall function	•
Minute minder	•
Safety switch-off	•
Individual setting options (e.g. buzzers)	•
Assistance programmes	•
Wipe protection	•

KM 7999 FL



Induction cooktop with onset controls
with TempControl for perfect frying results

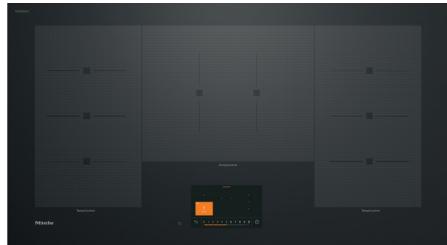

Cleaning convenience	
Easy to clean ceramic glass	•
Safety	
Safety switch-off	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	936
Dimensions in mm (height)	67
Casing height incl. connection box in mm	67
Dimensions in mm (depth)	520
Cutout dimensions in mm (width) with surface-mounted installation	916
Cutout dimensions in mm (depth) with surface-mounted installation	500
Internal cutout dimensions in mm (width) with flush installation	916
Internal cutout dimensions in mm (depth) with flush installation	500
External cutout dimensions in mm (width) with flush installation	940
External cutout dimensions in mm (depth) with flush installation	524
Weight in kg	26
Total rated load in kW	10.4
Voltage in V	230
Connection cable length in m	1.75
Standard accessories	
Mains cable	•
WiFi stick XKS 3170 W	•


KM 7999 FL

Induction cooktop with onset controls
with TempControl for perfect frying results

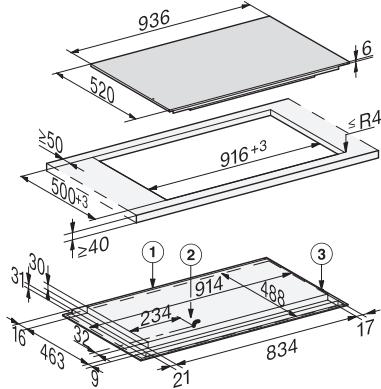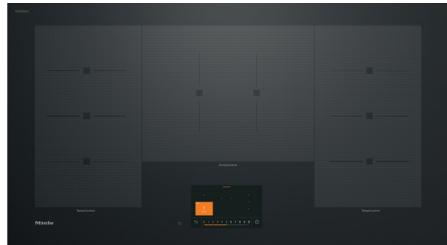

KM 7999 FL (installation drawing) - onset

- 1) Front
- 2) Mains connection box with mains connection cable, L = 1280 mm, are enclosed loosely
- 3) WLAN stick connection point

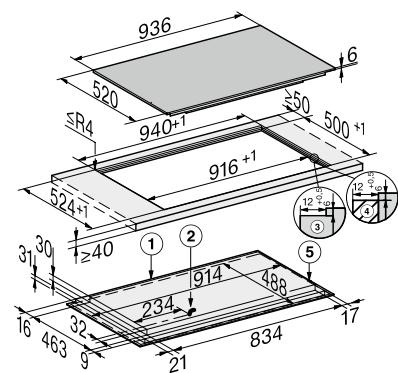

KM 7999 FL (installation drawing) - flush-fit

- 1) Front
- 2) Mains connection box with mains connection cable, L = 1280 mm, are enclosed loosely
- 3) Stepped cut-out natural stone countertop
- 4) Wood support 12 mm (not supplied)
- 5) WLAN stick connection point