

Specifications

It is a requirement of State Plumbing Codes that licensed plumbers carry out all tapware installations. All installations should comply with the relevant requirements of AS/NZS 3500 and local plumbing codes.

Pressure:

[1] Maximum Hydrostatic Pressure: 1000kpa. This pressure may be exceeded only under test conditions as per AS/NZS 3500. Where hydrostatic pressure exceeds the maximum stated above, pressure-limiting valves should be installed.

[2] Recommended Maximum Hydrostatic Pressure: 500kpa (AS/NZS 3500). [3] Recommended Minimum Hydrostatic Pressure: 150kpa

Temperature:

Maximum Water Temperature: 80° C. For optimum performance, hot and cold inlet water pressure should be equal.

Care and Maintenance

[1] Product should be inspected for surface damage prior to installation. [2] Cleaning and handling of all finishes must be performed carefully. [3] Clean products using a soft cloth with warm soapy water only. [4] Never use harsh detergents or abrasive cleaners as these will damage the product. [5] Water marks can be removed from Matt Finishes with an application of a carnauba wax based non-abrasive polish on a microfibre cloth. [6] Do not use undue pressure when cleaning and wipe in one direction only. [7] Contact with harsh chemicals such as hair dye, hair bleach etc with result in damage to the finish. [8] Tapware should never be installed using acetone silicones. [9] Avoid the use of wax based furniture creams as this can result in a build up of deposits which will detract from the appearance. [10] Rose Copper: A protective lacquer has been applied to this finish. This is required to maintain the stability of this finish and will be damaged if the above care and cleaning instructions are not followed. [11] Damage to finishes arising from improper installation or post installation use or failure to observe the above care and cleaning instructions will void all warranty agreements.

Warranty

Rogerseller tapware, bathroom fittings and sanitary ware are covered by a five (5) year warranty from date of purchase. For full terms and conditions please refer to rogerseller.com.au

Rogerseller Showrooms —

Melbourne  
173-177 Barkly Avenue  
Burnley VIC 3121  
P 03 9429 8888

Sydney  
18 Danks Street  
Waterloo NSW 2017  
P 02 8396 8700

Brisbane  
74-76 McLachlan Street  
Fortitude Valley QLD 4006  
P 07 3251 4333

Concept Stores —

Southern Innovations  
(Fishwick ACT)  
P 02 6143 2666

Southern Innovations  
(Mitchell ACT)  
P 02 6129 7666

Southern Innovations  
(Albury NSW)  
P 02 6022 2777

Routleys Plumbing Innovations  
(Malvern SA)  
P 08 8291 3000

rogerseller

rogerseller.com.au

Arq ii  
by Rogerseller

Wall Outlet 200mm

Installation  
Instructions

rogerseller

# Arq ii by Rogerseller

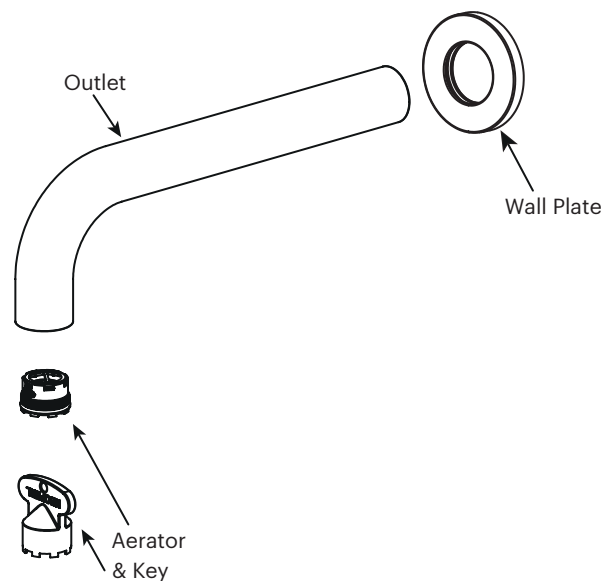


Fig.A



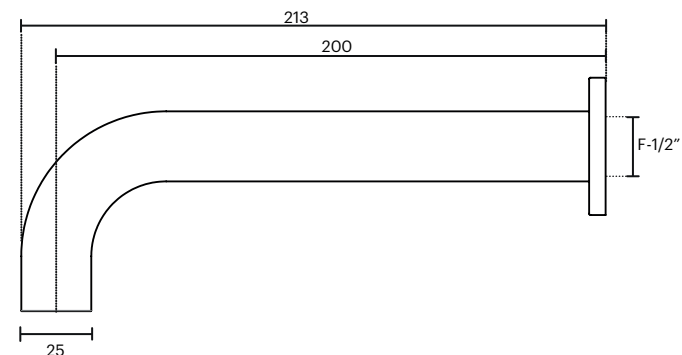


Fig.1

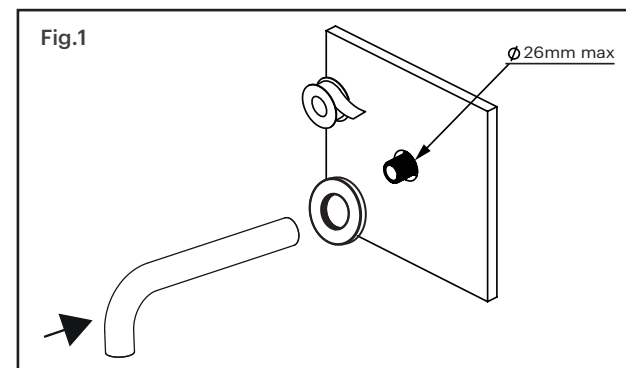

Arq ii by Rogerseller Wall  
Basin Outlet 200mm  
3646000501 — Chrome

Arq ii by Rogerseller Wall  
Bath Outlet 200mm  
3646000601 — Chrome

4 finishes available

## Installation

1. It is recommended to install in-line filters to ensure a cleaner flow of water to the product.
2. During installation and testing make sure the tapware is in the closed position.
3. When roughing-in the outlet, take note of the dimensions shown in **Fig. A** so that the finished wall and product is correctly positioned.
4. Do not high pressure test the supply system with the outlet blocked and the tap open, as this may damage the ceramic cartridge.
5. To complete the installation, as per **Fig.1**, carefully guide the wall plate over the end of the outlet, then screw the outlet onto the 1/2" Male BSP fitting protruding from the wall. Apply silicone to the rear of the plate and pressing firmly against the wall to create a seal with the finished wall surface.
6. Prior to introducing the mains supply, remove the hidden aerator from the end of the spout with the key provided. Then introduce the mains water to flush the supply lines. Reinstall the aerator.

Please leave instructions with the product or home owner