







Hybrid Fire Freestanding Grill K500HS

- 23" x 22" (506 square inches) of primary grilling surface
- Two cast bronze burners, 25,000 BTUs each
- Natural gas, bulk propane or 30 lb propane cylinder
- Ignition burner with electronic hot surface ignition
- Rotisserie system with infrared burner; motor mounted in cabinet
- Dual 18,000 BTU cooktop burners
- Ambient control panel lighting
- Flip-up warming rack
- Kalamazoo's Advanced Cooking Concept with Deep hopper cleaning
- Single Hybrid Fire Grilling Drawer
- Right end cabinet for optional propane cylinder storage
- One side shelf
- Standard heavy duty stainless steel rod grilling surface
- Optional laser-cut grilling surfaces available with your choice of patterns optimized for cooking meat, fish, and vegetables
- Marine-grade stainless steel available

WARNING: This product can expose you to chemicals including nickel, which are known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warningsca.gov



810 West Washington Boulevard
Chicago, IL 60607
8566 Krum Avenue
Galesburg, MI 49053
KalamazooGourmet.com
800.868.1699

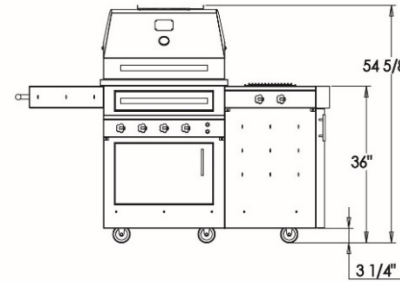

Overall Width	72.25 in (183.5 cm)
Overall Depth	32 in (81.3 cm)
Overall Height	54.63 in (138.7 cm)
Approximate Product Weight	550 lb (250 kg)
Gas Requirements	Natural Gas: 1/2" male NPT connection. 10 ft. gas hose with quick disconnect provided. Gas service line to deliver 7 i.w.c. at grill location. See BTU information below for pipe sizing.
	Bulk Propane: 1/2" male NPT connection. 10 ft. gas hose with quick disconnect provided. Gas service line to deliver 11 i.w.c. at grill location. See BTU information below for pipe sizing.
	Propane Cylinder: 30 lb cylinder. 2 ft. gas hose with dual regulator provided.
Electrical Requirements	120VAC/60Hz Includes 1 ft. (30.5 cm) 3-prong grounded power cord. 1.5V "AAA" battery x 1 for cooktop burner ignition.
Maximum AMP Usage	3 amps
Main Burners Rating	48,500 BTU propane/ 55,000 BTU NG
Total BTUs	100,100 BTU propane/ 111,300 BTU NG

Ensure proper gas pipe sizing. Diameter and length of the supply pipe may limit the pressure and BTU delivery.

For outdoor use only. Maintain at least 6 inches of clearance between the sides and back of the grill and any combustible surface. Never place the grill underneath an overhead combustible structure or surface. Do not place the grill in a location where the rear hood openings are likely to be exposed to a strong wind.

High altitude kit available.