


# Roeburn with Rinse

AUSH.4846

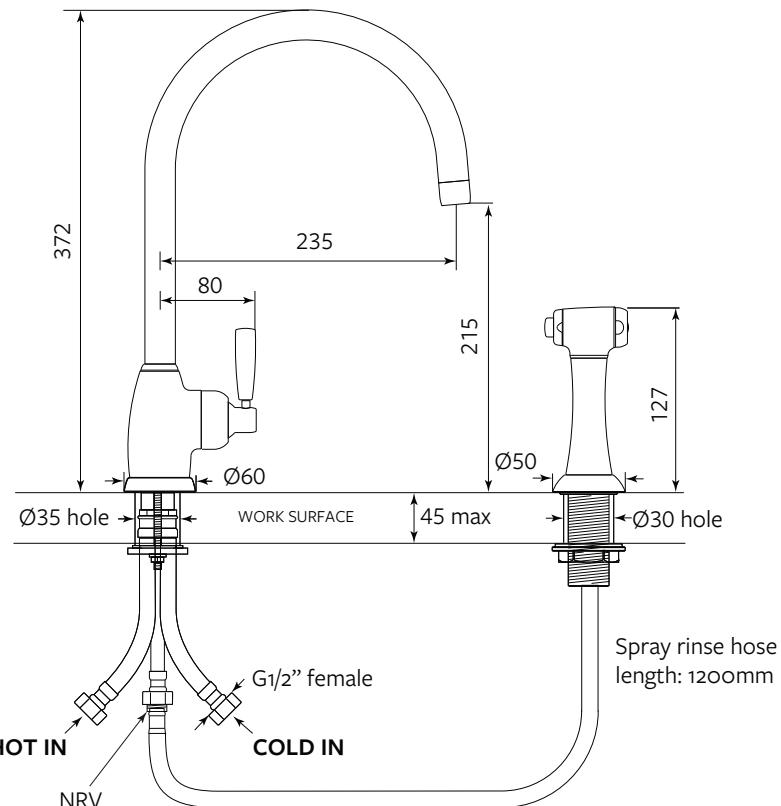

MODEL	CODE
Roeburn with Rinse - Chrome	AUSH.4846CP-3
Roeburn with Rinse - Nickel	AUSH.4846NI-3
Roeburn with Rinse - Pewter	AUSH.4846PF-3
Roeburn with Rinse - English Bronze	AUSH.4846EB-3
Roeburn with Rinse - Satin Brass	AUSH.4846SB-3
Roeburn with Rinse - Polished Brass	AUSH.4846BR-3
Roeburn with Rinse - Gold (special order)	AUSH.4846IG-3

Also Available: Roeburn (AUSH.4841) non spray-rinse model.



#### Features include:

- Handcrafted in the United Kingdom using premium low-lead brass
- Separate bench-mounted spray rinse tap with 1.2m flexible hose
- Single metal lever handle with engraved temperature indicators
- 1/4 turn German ceramic disc flow control
- Vernier insert for accurate handle alignment
- Supplied with dual check valve - Con-Serv DC 057
- 15 Year warranty. Please visit our website for individual finish warranties

#### Spray Rinse Requirements :

The spray rinse requires a minimum inlet water pressure of 100kPa, and a maximum of 500kPa to completely divert the water flow from the tap to the spray rinse.

Temperature range: Min 1°C. Max 70°C

Working Pressure: Min 1 Bar/15psi. Max 5 Bar/75psi

Packed Weight: 3.65kg

Flow Rates: 1 Bar: 5.3L/min

2 Bar: 9.3L/min

3 Bar: 11.2L/min

