



GM221130

GA601010:

Adjustable intermediate shelf 60cm

microwave oven Minimalistic series

door hinge: left

GM221130

- The microwave intelligently determines the ideal power level and cooking time, and stops automatically when done
- Simplified cleaning with an eco-conscious solution ensuring your appliance is always in proper conditions.
- Adaptable kitchen installation options: tall cupboard or wall-hanging cupboard
- The interface combines ease of use with efficiency
- From speeding up meal preparation to ensuring that gourmet touch, cook your way with grill combination

Highlights

Flush installation

Handleless full glass door with electronic door opening.

Full touch display.

Single operation and combination of microwave and grill

Automatic programmes.

Net volume 21 litres.

Heating methods / Programmes

Microwave operation with 6 output levels: max. 900, 600, 450, 360, 180, 90 W.

Full surface grill with 3 levels of intensity, maximum output 1300 W.

Full surface grill with microwave output levels 360, 180 and 90 W combinable.

10 automatic programs with weight indication:

3 defrosting programs

4 cooking programs

3 combination programs

Option to save up to 10 favourites via Gaggenau Home Connect.

Handling

Side-opening door opens up to 95° angle.

Electronic door opening.

Touch display operation.

42 display languages available.

Info texts for additional information.

Features

Innowave (inverter technology) for uniform microwave output.

Timer functions: cooking time, cooking time end, count-up timer.

Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.

Safety

Child lock to prevent accidental switch on or operation of the appliance.

Safety shut-off.

Thermally insulated door with double glazing.

Cooled housing with temperature protection.

Cleaning

Hygienic stainless steel interior with heat resistant glass base.

Cleaning aid programme.

Planning notes

Plan the niche without back wall.

Door hinge not reversible.

Minimum installation height 85 cm (top edge of niche bottom).

Height-adjustable feet.

Protrusion from appliance front to furniture cabinet 21 mm.


Installation above an oven with a standard furniture shelf or the intermediate shelf GA 601 010.

When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.

Connection

Total connected load 2.05 KW.


Connection cable 1.75 m, detachable.

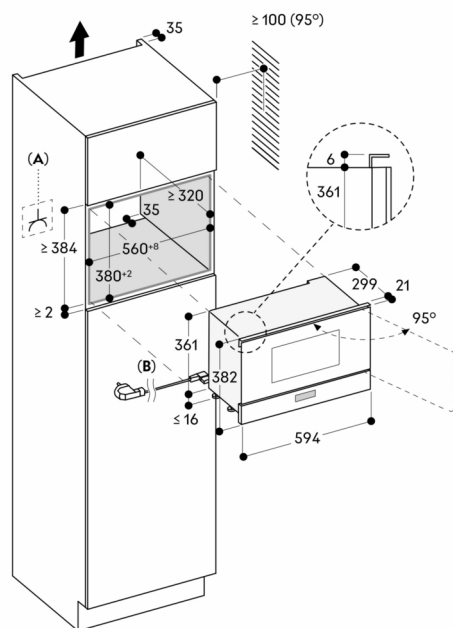

A: Accessible electrical connection
B: Cable with or without plug, depending on country

Measurements in mm

Installation in a wall-hanging cupboard

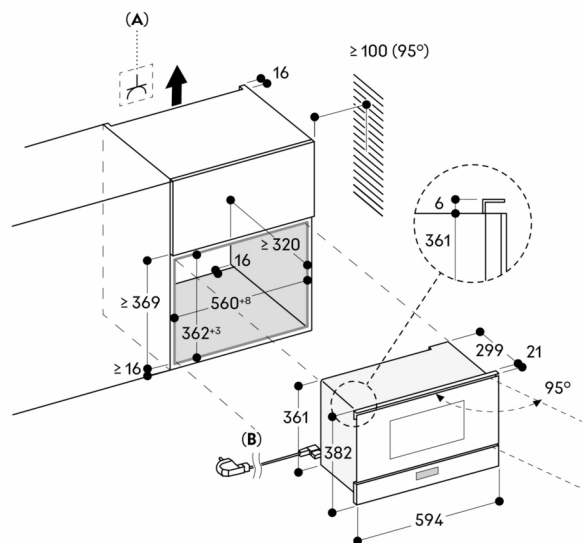

A: Accessible electrical connection
B: Cable with or without plug, depending on country

Measurements in mm