

ICBDD36**FEATURES**

| |
|---|
| Heavy-gauge stainless steel |
| Lowers when not in use |
| Adjustable discharge lets you negotiate around ducting |
| Delay-off feature |
| Delay-off feature shuts off blower after approximately 5 minutes |
| Reversible motor box can be installed on either side of the downdraft |
| Blower required (internal blower available) |
| Remote control operation from up to 3 m away |
| Rises 356 mm to whisk away smoke and odours |
| Rigorously tested in our U.S. manufacturing facilities for decades of use |
| Exceptional support from our Customer Care team |

ACCESSORIES

| |
|---|
| Trim kit for installation with sealed burner rangetop |
| Make-up air damper |

**BLOWER OPTIONS**

- 900 CMH Internal Blower




PRODUCT SPECIFICATIONS

| | |
|----------------------|--|
| Model | ICBDD36 |
| Dimensions | 914mmW x 356mmH x 51mmD |
| Weight | 36 kg |
| Electrical Supply | 220-240 VAC; 50/60 Hz |
| Electrical Service | ≤ 6 A |
| Discharge Location | Vertical or Horizontal |
| Discharge Dimensions | 150 mm round internal or 250 mm round remote |
| Receptacle | 3-prong grounding-type |

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

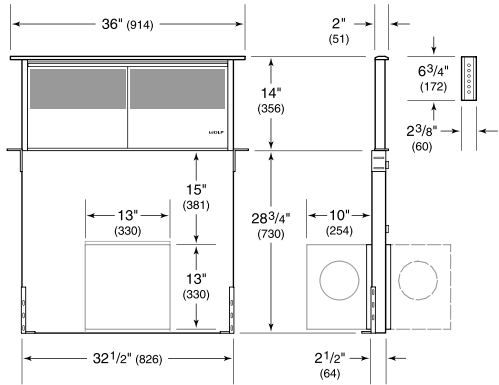

NOTE: Shown with front mounted internal blower with 6" (152) round discharge, dashed line represents rear mount.

GUIDE
ONLY.

THESE SPECIFICATIONS ARE A GUIDE ONLY. Not suitable for cabinetry, installation or services location. SUB-ZERO AND WOLF OFFER A CUSTOMISED DESIGN CHECK SERVICE to ensure your new appliances are installed perfectly. Please contact our Customer Care team for further information regarding our Design Check Service, or for detailed product specification and installation advice. Phone: 03 9600 2218 Email: enquiries@subzero.com Sub-Zero and Wolf Design Guides are also available via our website: www.subzero-wolf.com.au