

CS 1212-1 I

ProLine element

with two induction-heated cooking zones




- Professional design – ceramic glass with frame, 288 mm wide
- Particularly versatile – two cooking zones
- Easy & direct controls – operation via metal rotary dial control
- Broad performance spectrum – keeping warm function & TwinBooster
- Very convenient, safe – operating and residual heat indicator

Heating type	
Heating type	Induction
Design	
Print design	LightPrint
Stainless-steel frame	•
Miele logo embossed in stainless steel	•
Cooking zone details	
Number of cooking zones	2
Cooking zone	
Position	front centre
Type	Dual-circuit ring
Diameter in mm	Ø 100-160
Rating in W	1400
Booster in W	2200
Position	rear centre
Type	Dual-circuit ring
Diameter in mm	Ø 160-230
Rating in W	2300
Booster in W	3000
TwinBooster in W	3700
User convenience	
Operation via knobs	•
Pan and pan size recognition	•
Auto heat-up	•
Displays	
Digital power level display	•
Cleaning convenience	
Easy to clean ceramic glass	•
Safety	
Safety switch-off	•
Lock function	•
System lock	•
Fault monitoring	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	288
Dimensions in mm (depth)	520
Casing height incl. connection box in mm	73
Cutout dimensions in mm (width) with surface-mounted installation	272
Cutout dimensions in mm (depth) with surface-mounted installation	500
Voltage in V	230-240
Total rated load in kW	3.7
Weight in kg	8
Length of supply lead in m	2.0
Standard accessories	
Mains cable	•

CS 1212-1 I

ProLine element

with two induction-heated cooking zones

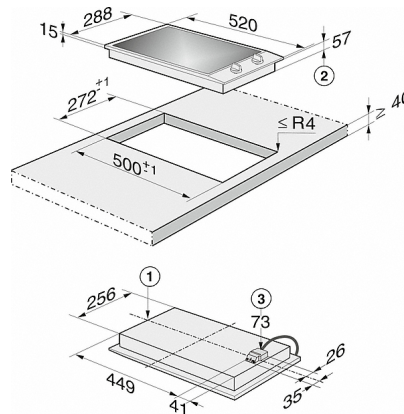

CS 1212-1 I (Installation drawing) VG AUS

Installation note: This unit should only be installed above a built-in oven if the latter has an integrated cooling fan.

Heart pacemaker: When the unit is in operation, the area immediately surrounding the unit is electromagnetically charged.

Under certain conditions, this could affect the proper functioning of pacemaker: If in any doubt, please consult the manufacturer of the pacemaker or your health care professional.

- 1) Front
- 2) Building-in depth
- 3) Mains connection box with mains connection cable, 1,440 mm