

ESW 6214

14 cm high gourmet warming drawer without handle
with the low temperature cooking function - much more than a warming drawer.




- Ultimate enjoyment with Low temperature cooking
- Versatile use thanks to four operating modes
- Convenient and easy – Touch control
- Easiest handling – Push2Open
- Safe is safe – Timer function with automatic switch off

Construction type	
Gourmet warming drawer	•
Design	
PureLine	•
Colour	Stainless steel/Clean Steel
ContourLine	•
Decorative stainless-steel trim	Narrow
Glass fascia panel with sensor controls	•
Control panel with symbols	•
Handleless	•
Convenience features	
Pre-heating crockery	•
Keep food warm for menu cooking	•
Perfect cooking results at low temperature	•
Precise electronic temperature regulation from 40 °C to 85 °C	•
Operating modes	
Cup warming	•
Plate warming	•
Keeping food warm	•
Low temperature cooking	•
User convenience	
Fully telescopic runners for easy loading and unloading	•
Push2open mechanism	•
Stop programming/Timer function	•
Capacity	6 place settings
Connection with coffee machine possible	•
Cleaning convenience	
Stainless steel front with CleanSteel finish	•
Flush touch display	•
Safety	
Cool front	•
Safety switch-off	•
Anti-slip mat	•
Technical data	
Appliance width in mm	595
Appliance height in mm	141
Appliance depth in mm	570
Useable interior height in mm	80
Total rated load in kW	1
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50-60
Length of supply lead in m	2.0
Mains cable with plug	Yes
Standard accessories	
Anti-slip mat	1


ESW 6214

14 cm high gourmet warming drawer without handle
with the low temperature cooking function - much more than a warming drawer.

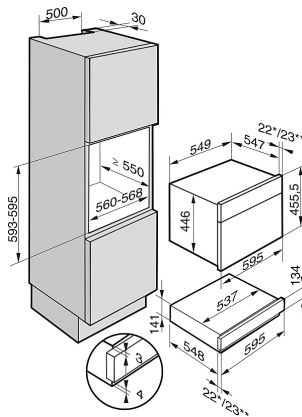

ESW 6114, ESW 6214 with DGC 6300/6400 (Installation drawing)

* Appliances with glass front
** Appliances with metal front

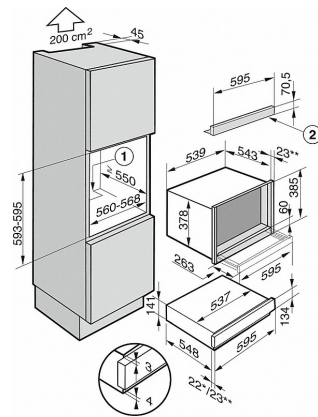

ESW 6114, ESW 6214 (Installation drawing)

* appliances with glass front
** Appliances with metal front

1) Cut-out support base for DGD 4635/6635/6605
2) AB 45-7 / optional accessories

To operate the DGD 4635 a plumbed water connection and water drainage is required. To plan the installation, refer to the connection requirements in advance of the sketch for water inlet and outlet.