


G 4720 SCi

Integrated dishwasher

Delay start and cutlery tray for maximum convenience.

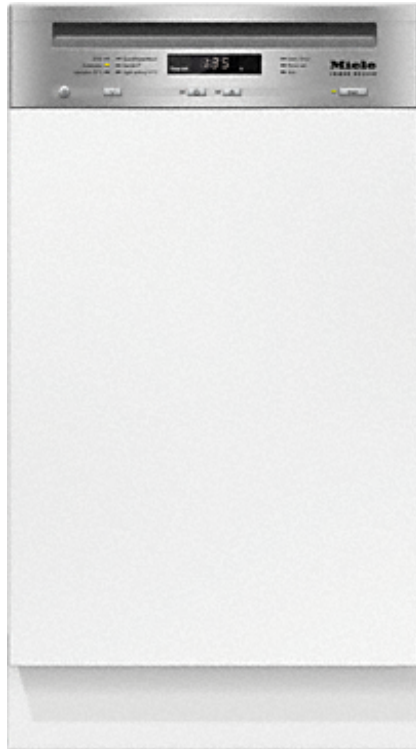

- Easy loading and unloading – Cutlery tray
- Perfect results – only 6.0 l water in the Automatic programme
- Long-lasting sparkle for your glasses – Perfect GlassCare
- Wash dishes when you want to – Delay start

Construction type	
Semi-integrated dishwasher	•
45 cm dishwasher	•
Design	
Colour	Stainless steel/CleanSteel
Control panel version	Straight fascia
Control type	Programme selector button
Display	3-digit 7-segment indicator
Display colour	White
Convenience	
Door closing aid	ComfortClose
Time left display	•
Delay start up to 24 hours	•
In-operation indicator light	Control indicator
Efficiency and sustainability	
Water consumption in the ECO programme in l	9.4
Water consumption in the Automatic programme in l from	6.0
Consumption values with ThermoSave® in ECO programme in kWh	0.35
Energy consumption in stand-by mode in W	0.2
Hot water connection	•
Alternating spray arm technology	•
Half load	•
Gentle treatment of crockery and glassware	
SensorDry	•
Recirculation Turbothermic drying	•
Perfect GlassCare	•
DetergentAgent	•
Wash programmes	
ECO	•
Automatic	•
Intensive 75 °C	•
Normal 55 °C	•
Gentle	•
QuickPowerWash	•
Dishwashing options	
Short	•
Basket design	
Cutlery loading	Cutlery tray
Technology and quality	
Sensors	AutoSensor
Electronic professional pump for variable spray pressure	•
Safety	
Waterproof system	•
Safety lock	•

G 4720 SCi

Integrated dishwasher

Delay start and cutlery tray for maximum convenience.





Technical data	
Niche width in mm	450
Niche height in mm	805
Niche depth in mm	570
Appliance width in mm	448
Appliance height in mm	805
Appliance depth in mm	570
Depth with door open in cm	116.5
Net weight in kg	41.4
Total rated load in kW	2.1
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Energy stars	3.0
Water stars	4.5
Length of water drain hose in m	1.50
Length of supply lead in m	1.90
Length of water inlet hose in m	1.50

G 4720 SCi

Integrated dishwasher

Delay start and cutlery tray for maximum convenience.

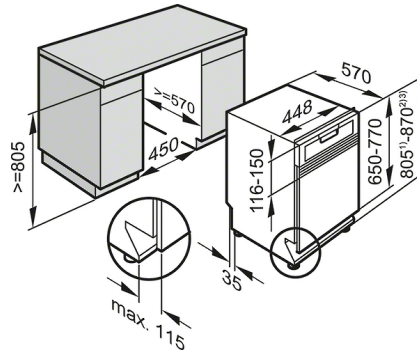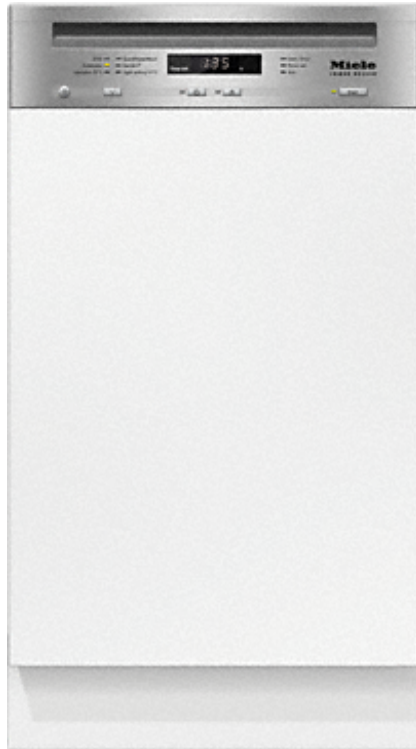

G1002/45, G5000/45, G6000/45 integrated dishwashers,
45cm (installation drawing)

- 1) Plinth height 35-155 mm
- 2) Plinth height 100-220 mm
- 3) Appliance height max. 930 mm with plinth height conversion kit (Mat.-No. 6.394.760)