


## G 4930 i Jubilee

Integrated dishwasher

Delay start and countdown indicator for great entry-level value.

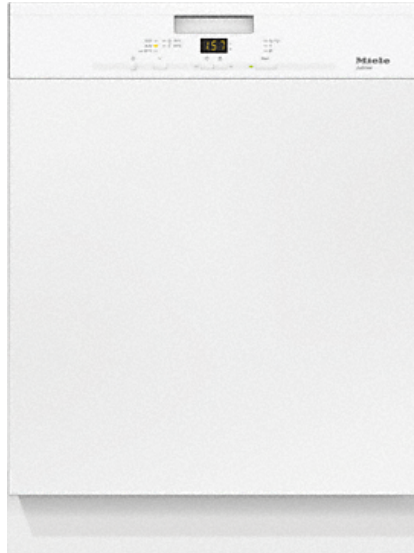


- Save up to 40 % more electricity – hot water connection
- Every piece of crockery has its place – Miele basket design
- Maximum versatility – Height-adjustable upper basket
- Very easy door opening and closing – ComfortClose

| Construction type                                           |                             |
|-------------------------------------------------------------|-----------------------------|
| Semi-integrated dishwasher                                  | •                           |
| 60 cm dishwasher                                            | •                           |
| Design                                                      |                             |
| Colour                                                      | Brilliant White             |
| Control panel version                                       | Straight fascia             |
| Control type                                                | Programme selector button   |
| Display                                                     | 3-digit 7-segment indicator |
| Display colour                                              | Yellow                      |
| Convenience                                                 |                             |
| Door closing aid                                            | ComfortClose                |
| Time left display                                           | •                           |
| Delay start up to 24 hours                                  | •                           |
| In-operation indicator light                                | Control indicator           |
| Efficiency and sustainability                               |                             |
| Water consumption in the ECO programme in l                 | 11.3                        |
| Water consumption in the Automatic programme in l from      | 6.5                         |
| Consumption values with ThermoSave® in ECO programme in kWh | 0.41                        |
| Energy consumption in stand-by mode in W                    | 0.2                         |
| Hot water connection                                        | •                           |
| Alternating spray arm technology                            | •                           |
| Half load                                                   | •                           |
| Gentle treatment of crockery and glassware                  |                             |
| Recirculation Turbothermic drying                           | •                           |
| DetergentAgent                                              | •                           |
| Wash programmes                                             |                             |
| ECO                                                         | •                           |
| Automatic                                                   | •                           |
| Intensive 75 °C                                             | •                           |
| Normal 55 °C                                                | •                           |
| Gentle                                                      | •                           |
| Dishwashing options                                         |                             |
| Short                                                       | •                           |
| Basket design                                               |                             |
| Cutlery loading                                             | Cutlery basket              |
| Basket design                                               | Comfort                     |
| Technology and quality                                      |                             |
| Sensors                                                     | AutoSensor                  |
| Electronic professional pump for variable spray pressure    | •                           |
| Safety                                                      |                             |
| Waterproof system                                           | •                           |
| Safety lock                                                 | •                           |

## G 4930 i Jubilee

Integrated dishwasher

Delay start and countdown indicator for great entry-level value.

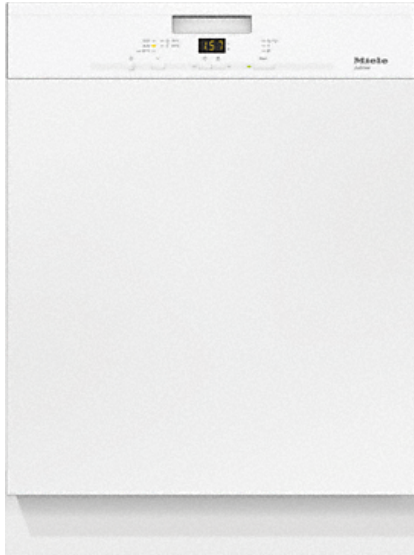

| Technical data                  |       |
|---------------------------------|-------|
| Niche width in mm               | 600   |
| Niche height in mm              | 805   |
| Niche depth in mm               | 570   |
| Appliance width in mm           | 598   |
| Appliance height in mm          | 805   |
| Appliance depth in mm           | 570   |
| Depth with door open in cm      | 116,5 |
| Net weight in kg                | 42,7  |
| Total rated load in kW          | 2,1   |
| Voltage in V                    | 230   |
| Fuse rating in A                | 10    |
| Number of phases                | 1     |
| Length of water drain hose in m | 1,50  |
| Length of supply lead in m      | 1,90  |
| Length of water inlet hose in m | 1,50  |