

G 6620 SCU

Built-under dishwashers



- Perfect results – only 6.5 l water in the Automatic programme

Construction type	
Built-under dishwasher	•
60 cm dishwasher	•
Design	
Colour	Stainless steel/CleanSteel
Control panel version	Straight fascia
Control type	Programme selector button
Display	3-digit 7-segment indicator
Display colour	White
Convenience	
Door closing aid	ComfortClose
Time left display	•
Delay start up to 24 hours	•
In-operation indicator light	Control indicator
Efficiency and sustainability	
Water consumption in the ECO programme in l	11.4
Water consumption in the Automatic programme in l from	6.5
Consumption values with ThermoSave® in ECO programme in kWh	0.32
Energy consumption in stand-by mode in W	0.2
Hot water connection	•
Alternating spray arm technology	•
Half load	•
Gentle treatment of crockery and glassware	
AutoOpen drying	•
SensorDry	•
Recirculation Turbothermic drying	•
Perfect GlassCare	•
DetergentAgent	•
Wash programmes	
ECO	•
Automatic	•
Intensive 75 °C	•
Normal 55 °C	•
Gentle	•
QuickPowerWash	•
Dishwashing options	
Short	•
Basket design	
Cutlery loading	3D cutlery tray+
FlexCare glass holder	2
Basket design	ExtraComfort
Technology and quality	
Sensors	AutoSensor
Electronic professional pump for variable spray pressure	•
Safety	
Waterproof system	•
Safety lock	•

G 6620 SCU

Built-under dishwashers




Technical data

Niche width in mm	600
Niche height in mm	805
Niche depth in mm	570
Appliance width in mm	598
Appliance height in mm	805
Appliance depth in mm	570
Depth with door open in cm	116.5
Net weight in kg	45.0
Total rated load in kW	2.1
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Energy stars	4.5
Water stars	5.0
Length of water drain hose in m	1.50
Length of supply lead in m	1.90
Length of water inlet hose in m	1.50

G 6620 SCU

Built-under dishwashers

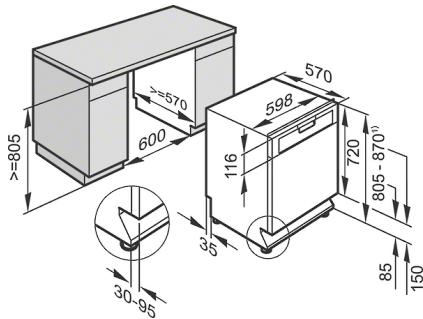

G1000er, G5000er, G6000er built-under dishwashers
(installation drawing) with footnote

1) Appliance height max. 930 mm with plinque height
conversion kit (Mat.-Nr. 6.394.761)