

## H 2661 BP

### Ovens

with pyrolytic cleaning for easy maintenance.



- 7-segment display with rotary selector – EasyControl
- Minimal cleaning effort – Pyrolytic cleaning
- Fewer fingerprints and easy to clean – CleanSteel
- Lots of room and versatility – 76 l oven capacity
- Protection from burns – cool front

Construction type	
Built-in oven	•
Design	
PureLine	•
Colour	Obsidian black
Display	EasyControl
Retractable dials	•
Convenience features	
Precise temperature regulation	50 - 250°C
Operating modes	
Defrosting	•
Gentle bake	•
Grill	•
Fan plus	•
Intensive bake	•
Conventional heat	•
Bottom heat	•
Fan grill	•
User convenience	
Time of day display	•
Minute minder	•
Start-stop programming	•
Safety switch-off	•
Programmable cooking duration	•
Individual settings	•
Door	
CleanGlass door	•
Door hinge	Bottom
Oven compartment	
Oven compartment volume in l	76
No. of shelf levels	5
Numbered shelf levels	•
No. of halogen lamps	1
Cleaning convenience	
Oven compartment with PerfectClean and catalytically enamelled rear liner	•
Pyrolytic self-cleaning	•
Unheated catalyser	•
Hinged grill heater element	•
Efficiency and sustainability	
Rapid heat-up	•
Safety	
Appliance cooling system and touch-cool fronts	•
Safety switch-off	•
System lock	•
Door lock during pyrolytic cleaning	•

## H 2661 BP

### Ovens

with pyrolytic cleaning for easy maintenance.




Technical data	
Niche width in mm	560
Niche height in mm	593
Niche depth in mm	550
Appliance width in mm	554
Appliance height in mm	579
Appliance depth in mm	547
Weight in kg	46.0
Total rated load in kW	3.6
Voltage in V	230
Fuse rating in A	16
Number of phases	1
Standard accessories	
Universal tray with PerfectClean	1
Baking and roasting rack without PerfectClean	2
Side racks without PerfectClean	1 pair
Mains cable	•
Mains plug	•

## H 2661 BP


### Ovens

with pyrolytic cleaning for easy maintenance.

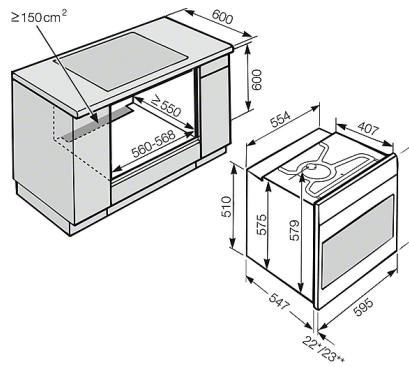


H 5000 EP/BP - 60 cm (Installation drawing)

\* Appliances with glass front  
\*\* Appliances with metal front

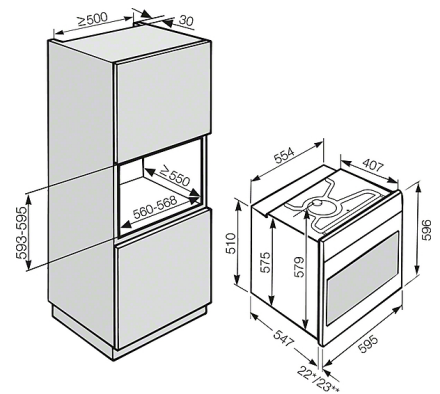

H 5000 BP; H 6000 BP; H 2000 BP; 60 cm (Installation drawing)

\* Appliances with glass front  
\*\* Appliances with metal front

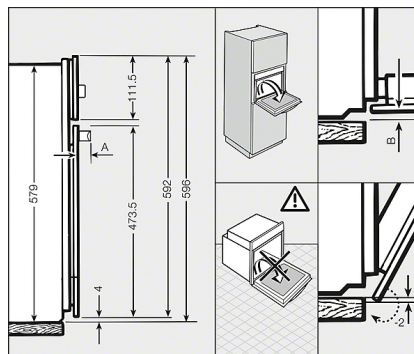

Detailed drawing H 6000, H 5000, H 4000, E/B, EP/BP, 76 litres, (Installation drawing) VG AUS, VG GB

A = Design "ContourLine": 45 mm  
Design "PureLine": 42 mm  
B = Appliances with glass front: 2,2  
Appliances with metal front: 1,2