

H 6461 BP

Ovens

with intuitive touch operation and Moisture Plus for perfect results.



- TFT text display with touch operation – DirectSensor
- Perfect baking and roasting results – Moisture Plus
- The simple way to perfect results – Automatic programmes
- Minimal cleaning effort – Pyrolytic cleaning

| Construction type | |
|--|--------------|
| Built-in oven | • |
| Design | |
| PureLine | • |
| Colour | Havana brown |
| Display | DirectSensor |
| Convenience features | |
| Precise temperature regulation | 30 - 300°C |
| Operating modes | |
| Defrosting | • |
| Automatic programmes | More than 60 |
| Auto roast | • |
| Gentle bake | • |
| Grill | • |
| Fan plus | • |
| Intensive bake | • |
| Moisture plus | • |
| Conventional heat | • |
| Bottom heat | • |
| Fan grill | • |
| Special applications | • |
| User convenience | |
| MultiLingua | • |
| DirectSelection of operating modes | • |
| Timed steam bursts programmable | • |
| Time of day display | • |
| Date display | • |
| Minute minder | • |
| Clock buffer in h | 200 |
| Start-stop programming | • |
| Safety switch-off | • |
| Programmable cooking duration | • |
| Actual temperature display | • |
| Recommended temperature | • |
| Buzzer when desired temperature is reached | • |
| User programmes | 20 |
| Individual settings | • |
| Door | |
| CleanGlass door | • |
| Door contact switch | • |
| Door hinge | Bottom |
| Oven compartment | |
| Oven compartment volume in l | 76 |
| No. of shelf levels | 5 |
| Numbered shelf levels | • |
| No. of halogen lamps | 1 |
| Cleaning convenience | |
| Pyrolytic self-cleaning | • |
| Unheated catalyser | • |
| Hinged grill heater element | • |

H 6461 BP

Ovens

with intuitive touch operation and Moisture Plus for perfect results.





| Efficiency and sustainability | |
|--|------|
| Energy-saving lighting | • |
| Residual heat utilisation | • |
| Rapid heat-up | • |
| Safety | |
| Appliance cooling system and touch-cool fronts | • |
| Safety switch-off | • |
| System lock | • |
| Door lock during pyrolytic cleaning | • |
| Technical data | |
| Niche width in mm | 560 |
| Niche height in mm | 593 |
| Niche depth in mm | 550 |
| Appliance width in mm | 554 |
| Appliance height in mm | 579 |
| Appliance depth in mm | 547 |
| Weight in kg | 47.0 |
| Total rated load in kW | 3.5 |
| Voltage in V | 230 |
| Fuse rating in A | 16 |
| Number of phases | 1 |
| Standard accessories | |
| Universal tray with PerfectClean | 1 |
| Baking tray with PerfectClean | 1 |
| Baking and roasting rack PyroFit | 1 |
| Recipe booklet | • |
| Mains cable | • |
| Descaling tablets | • |

H 6461 BP

Ovens

with intuitive touch operation and Moisture Plus for perfect results.

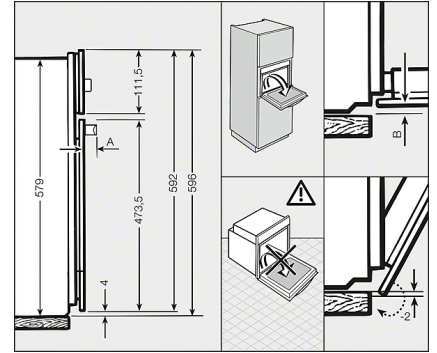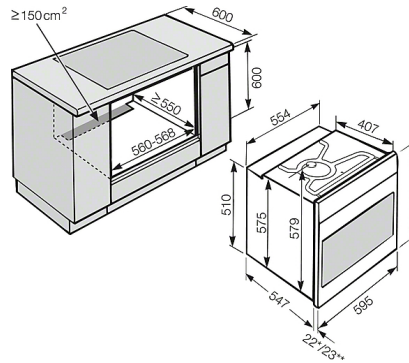


H 5000 EP/BP - 60 cm (Installation drawing)

* Appliances with glass front
** Appliances with metal front

Detailed installation drawing H 6000, H 5000, H 4000, E/B, EP/BP, 76 litres, (Installation drawing)

A = Design "ContourLine": 45 mm
Design "PureLine": 42 mm
B = Appliances with glass front: 2,2
Appliances with metal front: 1,2

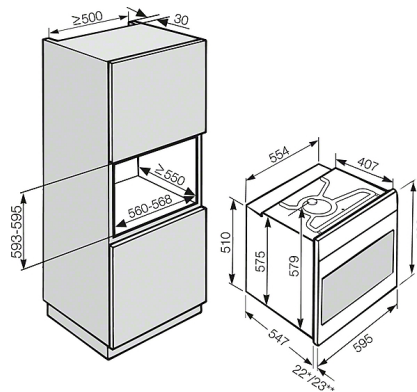

H 5000 BP; H 6000 BP; H 2000 BP; 60 cm (Installation drawing)

* Appliances with glass front
** Appliances with metal front