

H 6860 BPX

Handleless oven

- the multi-talented expert from Miele.



- handleless kitchen design & convenient door opening – Touch2Open
- Multicoloured TFT touch display with clear text – M Touch
- Perfect baking and roasting results Moisture Plus
- Precise temp. control means perfect cooking wireless food probe
- The simple way to perfect results Automatic programmes

Construction type	
Construction type	
Built-in oven	•
Design	
ArtLine	
Handleless	Ob - 1-1 1-1 1
Colour	Obsidian black
Display	M Touch
Convenience features	22 2222
Precise temperature regulation	30 - 300°C
Wireless food probe	
Crisp function	•
Operating modes	
Defrosting	
Automatic programmes	More than 100
Country-specific automatic programmes	
Auto roast	
Gentle bake	•
Grill	•
Economy grill	_ •
Fan plus	<u> </u>
Intensive bake	•
Moisture plus	•
Low temperature cooking	•
Conventional heat	•
Top heat	•
Bottom heat	•
Fan grill	•
Special applications	•
User convenience	
Touch2Open	•
MultiLingua	•
MyMiele	•
Automatic programme search function	•
Timed steam bursts programmable	•
Polyphonic buzzers	•
Time of day display	•
Date display	•
Minute minder	<u> </u>
Clock buffer in h	200
Start-stop programming	•
Safety switch-off	<u> </u>
Programmable cooking duration	
Value entry via number pad	- -
	- -
Actual temperature display	_ -
Door button confirmation	
Recommended temperature	
Buzzer when desired temperature is reached	
User programmes	20
Individual settings	•



H 6860 BPX

Handleless oven

- the multi-talented expert from Miele.



Door	
SoftOpen	•
CleanGlass door	•
Door contact switch	•
Door hinge	Bottom
Oven compartment	
Oven compartment volume in I	76
No. of shelf levels	5
Numbered shelf levels	•
No. of halogen lamps	3x
Cleaning convenience	
Pyrolytic self-cleaning	•
Heated catalyser	•
Hinged grill heater element	•
Efficiency and sustainability	
Energy-saving lighting	•
Residual heat utilisation	
Rapid heat-up	•
Safety	
Appliance cooling system and touch-cool fronts	<u> </u>
Safety switch-off	<u> </u>
System lock	•
Door lock during pyrolytic cleaning	•
Technical data	
Niche width in mm	560
Niche width in mm Niche height in mm	593
Niche width in mm Niche height in mm Niche depth in mm	593 550
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm	593 550 554
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm	593 550 554 579
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm	593 550 554 579 547
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Weight in kg	593 550 554 579 547 47.0
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Weight in kg Total rated load in kW	593 550 554 579 547 47.0 3.7
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V	593 550 554 579 547 47.0 3.7 230
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V Fuse rating in A	593 550 554 579 547 47.0 3.7 230 16
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V Fuse rating in A Number of phases	593 550 554 579 547 47.0 3.7 230
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V Fuse rating in A Number of phases Standard accessories	593 550 554 579 547 47.0 3.7 230 16
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V Fuse rating in A Number of phases Standard accessories Universal tray with PerfectClean	593 550 554 579 547 47.0 3.7 230 16 1
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V Fuse rating in A Number of phases Standard accessories Universal tray with PerfectClean Baking tray with PerfectClean	593 550 554 579 547 47.0 3.7 230 16 1
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V Fuse rating in A Number of phases Standard accessories Universal tray with PerfectClean Baking and roasting rack PyroFit	593 550 554 579 547 47.0 3.7 230 16 1
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V Fuse rating in A Number of phases Standard accessories Universal tray with PerfectClean Baking and roasting rack PyroFit FlexiClip runners PyroFit	593 550 554 579 547 47.0 3.7 230 16 1 1 1 2 1 pair
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V Fuse rating in A Number of phases Standard accessories Universal tray with PerfectClean Baking tray with PerfectClean Baking and roasting rack PyroFit FlexiClip runners PyroFit Request card for cookbook	593 550 554 579 547 47.0 3.7 230 16 1 1 2 1 pair
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V Fuse rating in A Number of phases Standard accessories Universal tray with PerfectClean Baking tray with PerfectClean Baking and roasting rack PyroFit FlexiClip runners PyroFit Request card for cookbook Mains cable	593 550 554 579 547 47.0 3.7 230 16 1 1 1 2 1 pair
Niche width in mm Niche height in mm Niche depth in mm Appliance width in mm Appliance height in mm Appliance depth in mm Weight in kg Total rated load in kW Voltage in V Fuse rating in A Number of phases Standard accessories Universal tray with PerfectClean Baking tray with PerfectClean Baking and roasting rack PyroFit FlexiClip runners PyroFit Request card for cookbook	593 550 554 579 547 47.0 3.7 230 16 1 1 2 1 pair




H 6860 BPX

Handleless oven

- the multi-talented expert from Miele.



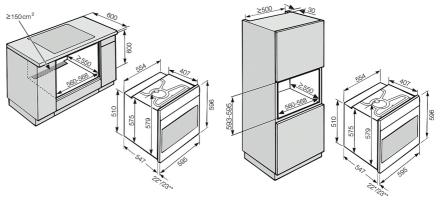


H 5000 EP/BP - 60 cm (Installation drawing)

- * Appliances with glass front ** Appliances with metal front

H 5000 BP; H 6000 BP; H 2000 BP; 60 cm (Installation drawing)

* Appliances with glass front
** Appliances with metal front



Detailed installation drawing H 6000 BPX, ArtLine, 76 Litres, (Installation drawing)