

KM 2357

Gas cooktop

with electronic functions for maximum safety and user convenience.




- Optimal – single-handed operation via rotary dials and QuickStart
- Professional design – 892mm wide stainless steel trough
- Particularly versatile – 5 burners incl. 1 dual wok
- Extremely safe – GasStop&Restart function
- Easy cleaning – dishwasher-safe ComfortClean pot rests

Heating type	
Heating type	Gas
Construction type	
Independent of cooker	•
Design	
Miele logo embossed in stainless steel	•
Cast iron pot rests (matt black enamelled)	•
Cooking zone details	
Number of cooking zones	5
Cooking zone	
Position	front left
Type	Economy burner
Rating in W	1000
Position	rear left
Type	High-speed burner
Rating in W	2700
Position	Centred
Type	Dual wok burner
Rating in W	4500
Position	rear right
Type	Standard burner
Rating in W	1700
Position	front right
Type	Standard burner
Rating in W	1700
User convenience	
Operation via sensor controls	Knob
Operation via knobs	•
Electronic ignition with single-hand operation	•
QuickStart	•
Cleaning convenience	
Dishwasher-proof pot rests	•
Safety	
Safety switch-off	•
GasStop & ReStart	•
Technical data	
Dimensions in mm (width)	892
Dimensions in mm (depth)	512
Casing height incl. connection box in mm	101
Cutout dimensions in mm (width) with surface-mounted installation	894
Cutout dimensions in mm (depth) with surface-mounted installation	514
Voltage in V	230
Total rated load in kW	11.9
Weight in kg	19
Length of supply lead in m	2.0
Standard accessories	
Mains cable	•
Jets for liquid gas	•
Wok ring	•
Small trivet	•

KM 2357

Gas cooktop


with electronic functions for maximum safety and user convenience.

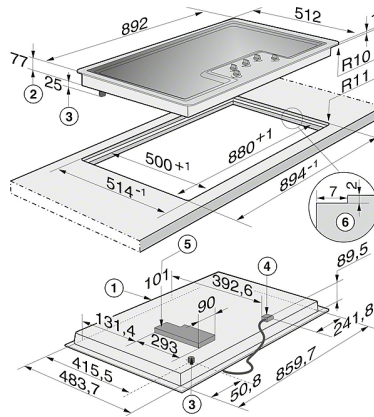

KM 2357 (Installation drawing) VG AUS

1. Front
2. Building-in depth
3. Gas connection R 1/2 - ISO 7-1 (DIN EN 10226)
4. Mains connection box with mains connection cable, L = 2,000 mm
5. Electronics housing - max. building-in depth, including electronics housing, 101 mm
5. Stepped cut-out for granite or marble worktops


Building-in information:
 Flush fit cooktops are only suitable for installation in granite, marble, or tiled worktops.
 For all other worktop materials, consult the worktop manufacturer whether it can be used with a flush-fit cooktop.
 As the appliance and the worktop cut-out have a certain dimensional tolerance, gap can vary.

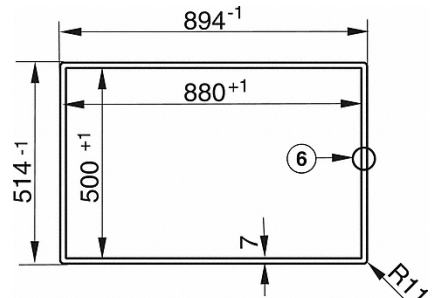

KM 2357 (Installation drawing) - Cut-out for granite or marble worktops - VG AUS

6. Stepped cut-out for granite or marble worktops


Building-in information:
 Flush fit cooktops are only suitable for installation in granite, marble, or tiled worktops.
 For all other worktop materials, consult the worktop manufacturer whether it can be used with a flush-fit cooktop.
 As the appliance and the worktop cut-out have a certain dimensional tolerance, gap can vary.

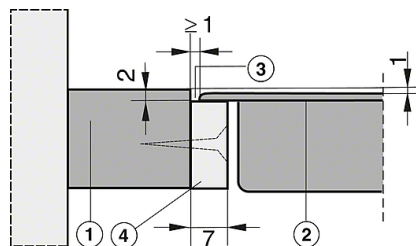

KM 2357 (Installation drawing) - Installation in solid wood or tiled worktops - VG AUS

1. Worktop
2. Gas cooktop
3. Gap
4. Wooden frame (7 mm, to be provided on-site)

Building-in information:
 Flush fit cooktops are only suitable for installation in granite, marble, or tiled worktops.
 For all other worktop materials, consult the worktop manufacturer whether it can be used with a flush-fit cooktop.
 As the appliance and the worktop cut-out have a certain dimensional tolerance, gap can vary.

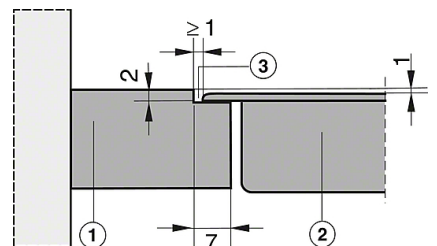

KM 2357 (Installation drawing) Installation in granite and marble worktops - VG AUS

1. Worktop
2. Gas cooktop
3. Gap

Building-in information:
 Flush fit cooktops are only suitable for installation in granite, marble, or tiled worktops.
 For all other worktop materials, consult the worktop manufacturer whether it can be used with a flush-fit cooktop.
 As the appliance and the worktop cut-out have a certain dimensional tolerance, gap can vary.