

## KM 6304

Induction cooktop with onset controls  
with PowerFlex cooking zone for maximum versatility and performance.



- Intuitive selection via numerical linear keybank – Direct control
- Attractive design – 614mm wide with all-round frame
- Versatile and fast – 4 cooking zones incl. 1 PowerFlex area
- Communication with rangehood – automatic function Con@ctivity 2.0
- Broad performance spectrum – keeping warm function & TwinBooster

Heating type	
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Elegant glass ceramic surface	•
Print design	LightPrint
Stainless-steel frame	•
Cooking zone details	
Number of cooking zones	4
PowerFlex cooking zones	
No.	2
Diameter in mm	150x230
Rating in W	2.100
Booster in W	3.000
TwinBooster in W	3700
Cooking zone	
Position	front left
Type	Dual-circuit ring
Diameter in mm	Ø 140-200
Rating in W	1850
Booster in W	3000
Position	rear left
Type	Dual-circuit ring
Diameter in mm	Ø 100-160
Rating in W	1400
Booster in W	2200
Position	right
Type	PowerFlex bridge
Diameter in mm	230x390
Rating in W	3400
Booster in W	4800
TwinBooster in W	7400
User convenience	
Operation via sensor controls	Direct selection
Pan and pan size recognition	•
Stop & Go function	•
Minute minder	•
Safety switch-off	•
Auto heat-up	•
Keeping warm	•
Individual setting options (e.g. buzzers)	•
Displays	
Digital power level display	•
Appliance networking	
Automatic function Con@ctivity 2.0	•
Cleaning convenience	
Easy to clean ceramic glass	•

KM 6304


Induction cooktop with onset controls  
with PowerFlex cooking zone for maximum versatility and performance.



Safety	
Safety switch-off	•
Lock function	•
System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	614
Dimensions in mm (depth)	514
Casing height incl. connection box in mm	48
Cutout dimensions in mm (width) with surface-mounted installation	600
Cutout dimensions in mm (depth) with surface-mounted installation	500
Voltage in V	230
Total rated load in kW	7.3
Weight in kg	10
Length of supply lead in m	1.4
Standard accessories	
Mains cable	•

## KM 6304

Induction cooktop with onset controls  
with PowerFlex cooking zone for maximum versatility and performance.

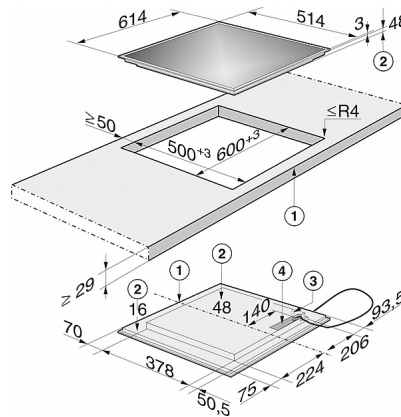

KM 6304, KM 6322 PowerFlex (Installation drawing)

1. Front
2. Casing depth
3. Miele@home connection
4. Mains connection box, mains connection cable, L = 1440 mm, supplied loose