

## KM 6363-1

Induction cooktop with onset controls  
with PowerFlex cooking zone for maximum versatility and performance.




- Simple and direct control – operation via rotary dial controls
- Attractive design – 806mm wide with all-round frame
- Versatile and fast – 4 cooking zones incl. 1 PowerFlex area
- Communication with rangehood – automatic function Con@ctivity 2.0
- with 5 kW Booster power for shortest heat-up times – WaterBoost

<b>Heating type</b>	
Heating type	Induction
<b>Construction type</b>	
Independent of cooker	•
<b>Design</b>	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Print design	LightPrint
Stainless-steel frame	•
<b>Cooking zone details</b>	
Number of cooking zones	4
<b>PowerFlex cooking zones</b>	
No.	2
Diameter in mm	150x230
Rating in W	2.100
Booster in W	3.000
TwinBooster in W	3650
<b>Cooking zone</b>	
Position	front left
Type	Dual-circuit ring
Diameter in mm	Ø 100-230
Rating in W	2300
Booster in W	3200
TwinBooster in W	5000
Position	rear left
Type	Dual-circuit ring
Diameter in mm	Ø 140-200
Rating in W	1850
Booster in W	3000
Position	right
Type	PowerFlex bridge
Diameter in mm	230x390
Rating in W	3400
Booster in W	4800
TwinBooster in W	7300
<b>User convenience</b>	
Operation via sensor controls	Knob
Operation via knobs	•
Pan and pan size recognition	•
Auto heat-up	•
Keeping warm	•
<b>Displays</b>	
Digital power level display	•
<b>Appliance networking</b>	
Automatic function Con@ctivity 2.0	•
<b>Cleaning convenience</b>	
Easy to clean ceramic glass	•

## KM 6363-1



Induction cooktop with onset controls  
with PowerFlex cooking zone for maximum versatility and performance.

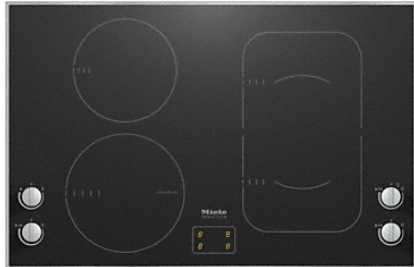

Safety	
Safety switch-off	•
System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	806
Dimensions in mm (depth)	526
Casing height incl. connection box in mm	45
Cutout dimensions in mm (width) with surface-mounted installation	780
Cutout dimensions in mm (depth) with surface-mounted installation	500
Voltage in V	230
Total rated load in kW	7.3
Weight in kg	14
Length of supply lead in m	1.4
Standard accessories	
Mains cable	•


## KM 6363-1

Induction cooktop with onset controls  
with PowerFlex cooking zone for maximum versatility and performance.

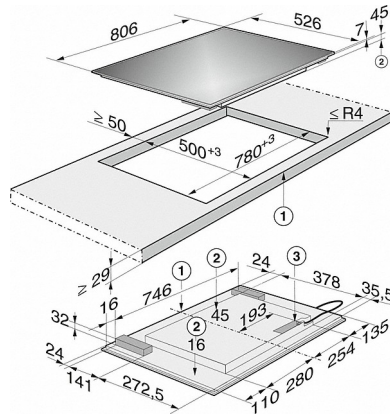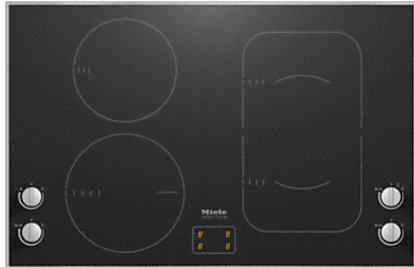

KM 6363 PowerFlex (Installation drawing) - LightPrint

- 1) Front
- 2) Casing depth
- 3) Mains connections box, mains connections cable, L = 1440 mm supplied separately

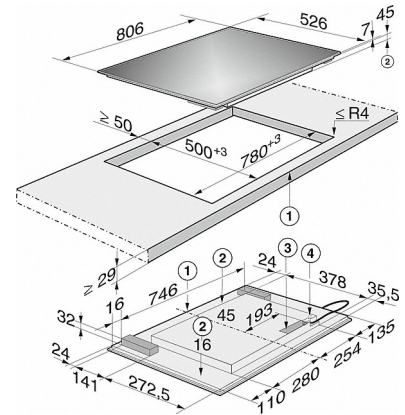

KM 6363-1 PowerFlex (Installation drawing) - LightPrint

- 1) Front
- 2) Casing depth
- 3) Mains connections box, mains connections cable, L = 1440 mm supplied separately
- 4) Con@ctivity connection point