

KM 6388

Induction cooktop with onset controls
in maximum width for the ultimate in cooking and user convenience.



- Fast selection w. numerical linear keybanks – Direct control plus
- Attractive design – 942mm wide with all-round frame
- Versatile and fast – 5 cooking zones incl. 2 PowerFlex zones
- Communication with rangehood – automatic function Con@ctivity 2.0
- Broad performance spectrum – keeping warm function & TwinBooster

Heating type	Induction
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Print design	LightPrint
Stainless-steel frame	•
Cooking zone details	
Number of cooking zones	5
PowerFlex cooking zones	
No.	4
Diameter in mm	150x230
Rating in W	2.100
Booster in W	3.000
TwinBooster in W	3650
Cooking zone	
Position	left centre
Type	PowerFlex bridge
Diameter in mm	230x390
Rating in W	3400
Booster in W	4800
TwinBooster in W	7300
Position	Centred
Type	Dual-circuit ring
Diameter in mm	Ø 140-280
Rating in W	2600
Booster in W	3300
TwinBooster in W	5500
Position	right
Type	PowerFlex bridge
Diameter in mm	230x390
Rating in W	3400
Booster in W	4800
TwinBooster in W	7300
User convenience	
Operation via sensor controls	Direct Control Plus
Pan and pan size recognition	•
Stop & Go function	•
Minute minder	•
Safety switch-off	•
Auto heat-up	•
Keeping warm	•
Individual setting options (e.g. buzzers)	•
Displays	
Digital power level display	•
Appliance networking	
Automatic function Con@ctivity 2.0	•
Cleaning convenience	
Easy to clean ceramic glass	•

KM 6388

Induction cooktop with onset controls
in maximum width for the ultimate in cooking and user convenience.




Safety	
Safety switch-off	•
Lock function	•
System lock	•
Fault monitoring	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	942
Dimensions in mm (depth)	526
Casing height incl. connection box in mm	45
Cutout dimensions in mm (width) with surface-mounted installation	916
Cutout dimensions in mm (depth) with surface-mounted installation	500
Voltage in V	230
Total rated load in kW	11.0
Weight in kg	17
Length of supply lead in m	1.4
Standard accessories	
Mains cable	•

Induction Cooktops

Miele

KM 6388

Induction cooktop with onset controls
in maximum width for the ultimate in cooking and user convenience.

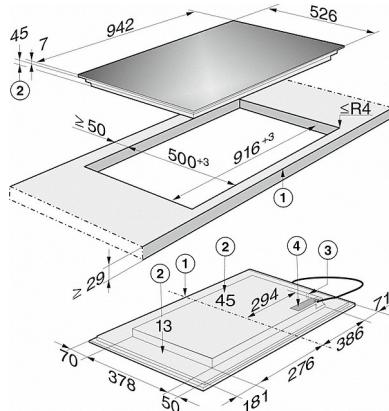

KM 6388 (installation drawing)

- 1) Front
- 2) Casing depth
- 3) Miele@home connection point
- 4) Mains connection box. Mains connection cable, L = 1440 mm supplied loose