

KM 6629

Induction cooktop with onset controls
with TempControl for intelligent and easy frying



- Intuitive and quick selection via number sequences – Smart Select
- Attractive design – 764mm wide with all-round frame
- Smart and versatile – 4 cooking zones including TempControl
- Communication with rangehood – automatic function Con@ctivity 2.0
- Broad performance spectrum – Food Warming Plus and TwinBooster

Heating type	
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Print design	LightPrint
Stainless-steel frame	•
Cooking zone details	
Number of cooking zones	4
PowerFlex cooking zones	
No.	2
Diameter in mm	150x230
Rating in W	2.100
Booster in W	3.000
TwinBooster in W	3650
Cooking zone	
Position	front left
Type	Dual-circuit ring
Diameter in mm	Ø 160-230
Rating in W	2300
Booster in W	3000
TwinBooster in W	3700
Position	rear left
Type	Dual-circuit ring
Diameter in mm	Ø 100-160
Rating in W	1400
Position	right
Type	PowerFlex bridge
Diameter in mm	230x390
Rating in W	3400
Booster in W	4800
TwinBooster in W	7300
User convenience	
Operation via sensor controls	Smart Select
Pan and pan size recognition	•
Stop & Go function	•
Minute minder	•
Safety switch-off	•
Auto heat-up	•
Keeping warm	•
Individual setting options (e.g. buzzers)	•
Displays	
Digital power level display	•
Appliance networking	
Miele@home	•
Automatic function Con@ctivity 2.0	•
Cleaning convenience	
Easy to clean ceramic glass	•

KM 6629


Induction cooktop with onset controls
with TempControl for intelligent and easy frying



Safety	
Safety switch-off	•
Lock function	•
System lock	•
Fault monitoring	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	764
Dimensions in mm (depth)	504
Casing height incl. connection box in mm	48
Cutout dimensions in mm (width) with surface-mounted installation	750
Cutout dimensions in mm (depth) with surface-mounted installation	490
Voltage in V	230
Total rated load in kW	7.3
Weight in kg	12
Length of supply lead in m	1.4
Standard accessories	
Mains cable	•

KM 6629

Induction cooktop with onset controls
with TempControl for intelligent and easy frying

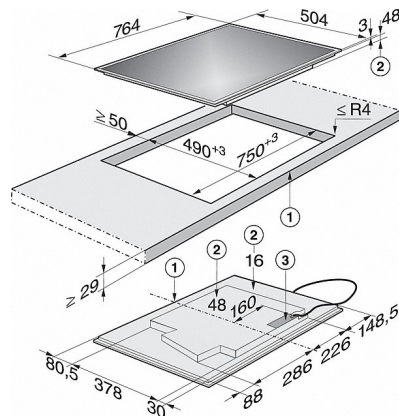

KM 6629 (Installation drawing)

1. Front
2. Casing depth
3. Mains connection box. Mains connection cable L = 1440 mm, supplied loose