


## PFD 101 i

Integrated dishwasher  
for easily managing piles of domestic dishes.

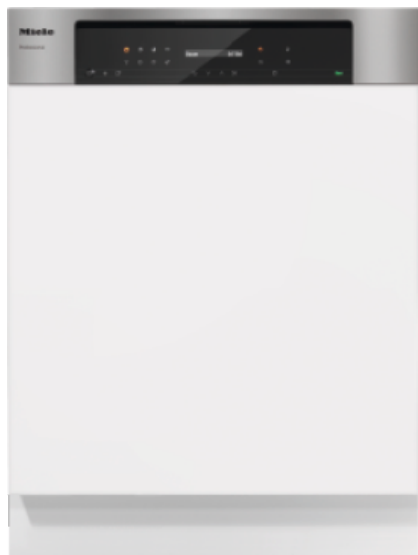

- Wash performance: 14 place settings in just 36min.\*
- Everything completely dry  
– AutoOpen assisted drying
- Intuitive to operate thanks to clear control panel design
- Flexible loading of load items for the best cleaning results


EAN : 4002516446002 / Article no. : 61010111AUS / Mat. no. : 11807700

Construction type and version	
Construction type	Semi-integrated dishwasher
Range	ProfiLine
Wash system	Fresh water
Number of levels	2
Front	Without front
Side panels	Galvanised
Minimum front panel weight in kg	4
Maximum front panel weight in kg	11
Application	
Suitable for retirement and care homes	•
Suitable for guesthouses	•
Suitable for child care facilities	•
Suitable for universities and schools	•
Suitable for offices	•
Suitable for small businesses	•
Suitable for sports clubs	•
Performance data	
Proven hygiene	•
Circulation pump Qmax in l/min.	75
Shortest programme duration in min.	36
Maximum final rinse temperature in °C	82
Cleaning performance, place settings/cycle	14
Service life in wash cycles	12,500
Controls	
Control system	Electronic controls
Programme selection	Program Selector Buttons
Max. delay start in h	24
Time left display	•
Programmes [number]	8
Programme sequence indicator	•
Filter indicator light	•
Selectable display languages	•
Standard electrical connection	
Electrical connection	AC 230V 50HZ
Heater rating in kW	1.90
Total connected load in kW	2.10
Fuse rating in A	10
Length of mains connection cable in m	1.70
Provided with plug	•

PFD 101 i

Integrated dishwasher


for easily managing piles of domestic dishes.

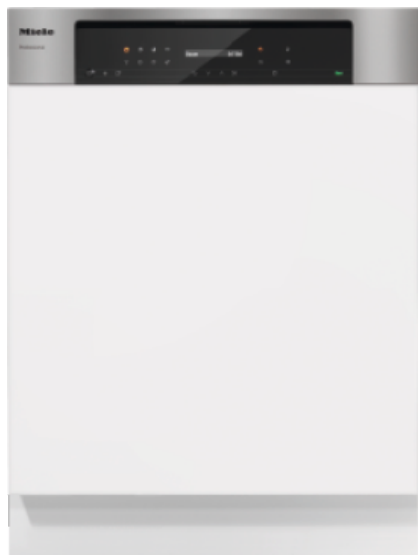

Possible voltage variant 1	
Electrical connection	3N AC 400V 50HZ
Heater rating in kW	7.1
Total connected load in kW	7.30
Fuse rating in A	16
Water connection/drainage	
Cold or hot water [number]	1
Required flow pressure in bar	0,30-10,00
Drain pump [DN]	22
Maximum delivery head for drain pump in cm	100
Integrated water softener	•
Maximum water hardness in mmol/l	6.50
Water protection system	Waterproof system
Length of water inlet hose in cm	150
Length of water drain hose in cm	150
Dimensions and weight	
External dimensions, net height in mm	805
External dimensions, net width in mm	598
External dimensions, net depth in mm	570
External dimensions, gross height in mm	970
External dimensions, gross width in mm	670
External dimensions, gross depth in mm	670
Usable space in wash cabinet, height in mm	540
Usable space in wash cabinet, width in mm	510
Usable space in wash cabinet, depth of upper basket in mm	450
Usable space in wash cabinet, depth of lower basket in mm	450
In-feed height above floor in mm	210
Net weight in kg	42
Gross weight in kg	49
Maximum floor loading in N	1,000
Emissions data	
Sound power (LwA) in dB(A) re 1 pW	48.0
Programmes	
Universal	•
Short	•
Hygiene	•
Cold/Pre-wash	•
Glasses	•
Plastics	•
Energy save/Eco	•
Intensive	•

## PFD 101 i

Integrated dishwasher  
for easily managing piles of domestic dishes.

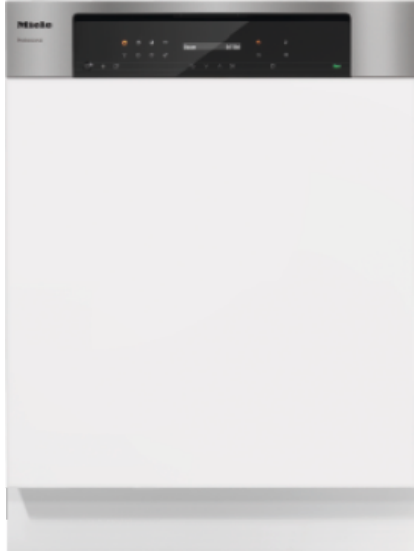

Basket design	
ExtraComfort baskets	•
Flexible FlexLine basket design	•
FlexCare glass holder [number]	2
FlexCare cup rack [number]	1
Cutlery basket	•
Height-adjustable upper basket	•
Features	
Commercial-grade electrical connection	•
Drying	AutoOpen assisted drying Extra drying Active condensation drying
1 combi dispenser in the door for powder cleaning agent and rinsing agent	•
Wash cabinet made from high-quality stainless steel	•
AutoClose	•
EcoFeedback	•
Brilliant GlassCare	•
Safety lock	•
Adjustable final rinse temperature	•
Optical interface	•
SmartStart	•
FlexiTimer with EcoStart	•
Connection options	
External dispensing module for liquid detergent	•
Standards, test certificates and symbols	
CE	•
Complies with Machinery Directive 2006/42/EC	•
VDE	•
EMC radio suppressed	•
EN 1717	•
WaterMark	•