






HYDROTAP G5 BCS ARC CHROME



BOILING

CHILLED

SPARKLING

FILTERED

Order Code H52783Z00AU

Zip HydroTap Design Range Boiling, Chilled, Sparkling, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.



Manufacturing Code	H52783Z00AU
Capacity	Residential

Tap	Zip HydroTap Design Range ARC Tap (Chrome)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.53kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W339mm x D460mm x H333mm
Product Approvals	WaterMark, RCM, ARC
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)


Installation Requirements


'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com'

Installation Detail


Ventilation requirements Contact your local service provider if ventilation is not suitable

Clearance envelope
Position the Tap and the Command Centre as close together as possible.






Air outlet louvre (if required)
Cut-out in door/wall, towards the top of the cabinet




Air inlet cut-out (required)
Cut-out in cabinet floor

HydroTap Tap options


HydroTap Arc Tap




HydroTap Cube Tap




Standalone Font with Arc Tap

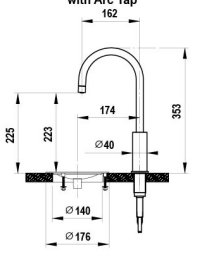


Cutting detail
174 for HydroTap Arc/Cube
3-off, 10 holes @ 155mm PCD, equispaced
140 hole for bowl
176 outline of Font
35 hole for tap



Tap Positioning
Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount on a Font (available as an accessory).



35mm hole for HydroTap Tap

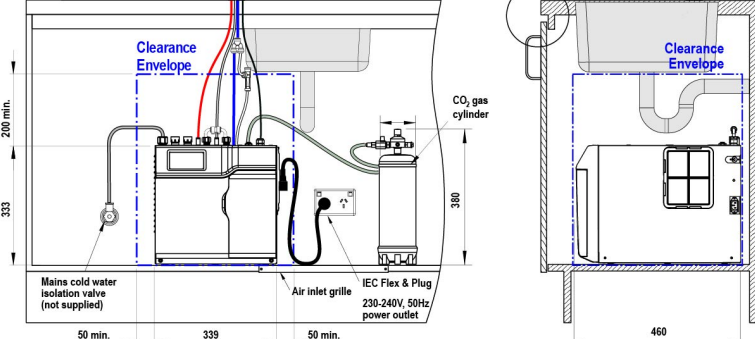

HydroTap Arc

Clearance Envelope

CO₂ gas cylinder

Mains cold water isolation valve (not supplied)

Air inlet grille

IEC Flex & Plug 230-240V, 50Hz power outlet

4mm buffer pad air space

SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

HydroTap G5
BCS Home
shown with HydroTap Arc

